




# Steaming Hot Water Tap

Filtered 98°C water on tap

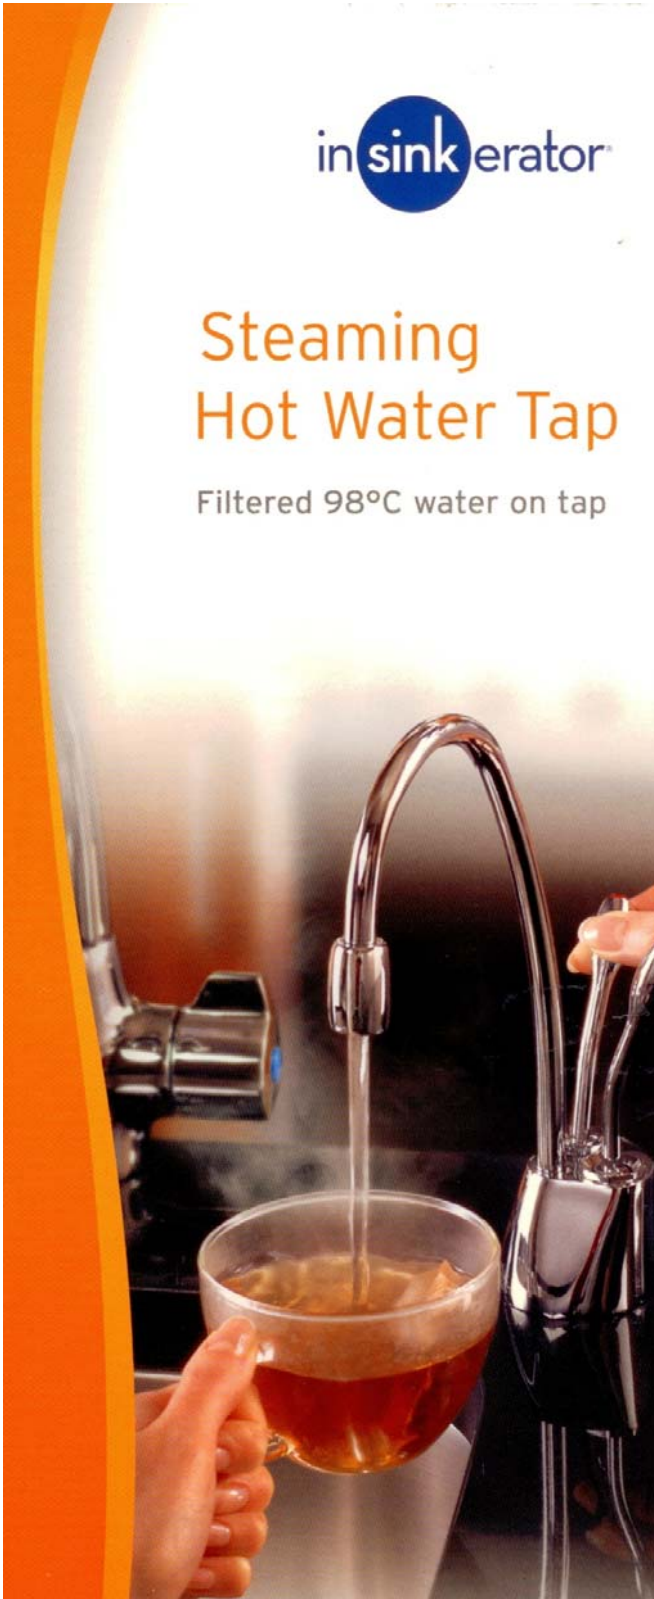

Deliciously hot or refreshingly cold filtered water.

An integral part of your daily routine ... for Food and Drink... Baby Care... Cleaning and other uses

# STEAMING HOT FILTERED WATER

... at the touch of a lever

You don't have to fill the kettle and wait for it to boil, you just push and serve.

It's so economical and energy efficient that you can help the environment and save money into the bargain.



Boiling and cold/chilled water faucet



Boiling water faucet



Undersink configuration with filter




Aqua Fresh Holdings Pty Ltd  
"Vineyards on Blackwood" Centre  
40 Blackwood St, Mitchelton Qld 4053  
Ph: 07 3355 1591 Free-call 1800 654 440  
Fax: 07 3855 3332 Email: [info@aquafresh.com.au](mailto:info@aquafresh.com.au)  
Web: [www.aquafresh.com.au](http://www.aquafresh.com.au)

# InSinkErator steaming hot water taps... instant filtered 98°C water

Efficient, modern and energy saving, *InSinkErator* steaming hot water taps give you instant 98°C hot water... on tap, 24 hours a day. Now there's no need to heat the jug or kettle every time you want hot water, simply turn on the tap for instant, steaming hot water.




Model HC-1100




GN-1100




H-990


	Model HC-1100	GN-1100	H-990
<b>Full In home Warranty</b>	<b>2 years</b>	<b>2 years</b>	<b>2 years</b>
Capacity	2.5 Litre Stainless Steel tank dispenses 100 cups of 98°C water per hour	2.5 Litre Stainless Steel tank dispenses 100 cups of 98°C water per hour	2.5 Litre Stainless Steel tank dispenses 100 cups of 98°C water per hour
Electrical	220-240 volts A.C. 1300 watts, heating element with grounded three (3) pin plug.	220-240 volts A.C., 1300 watts, heating element with grounded three (3) pin plug	220-240 volts A.C. 1300 watts, heating element with grounded three (3) pin plug
Thermostat	Electronic, adjustable from 88°C to 98°C (factory pre-set at 96°C)	Electronic, adjustable from 88°C to 98°C (factory pre-set at 96°C)	Electronic, adjustable from 88°C to 98°C (factory pre-set at 96°C)
Hot Valve	Instant, self closing	Instant, self closing	Instant, self closing
Cold Valve	Manual return	-	-
Filter	Included	Included	N/A
Shipping Weight	Approx. 5.5kg empty	Approx. 5.5kg empty	Approx. 4.0kg empty
Required hole diameter	35mm - 38mm	35mm - 38mm	32mm - 38mm
Required supply pressure	172 - 862 KPa (1.7 - 8.6 bar) (25 - 125 psi)	172 - 862 KPa (1.7 - 8.6 bar) (25 - 125 psi)	177 - 862 KPa (1.7 - 8.6 bar) (25 - 125 psi)
 Replacement Filters	Pack of 2 Filters	Pack of 2 Filters	N/A

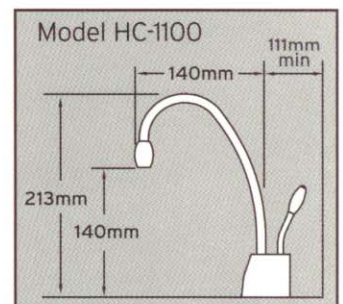

HC-1100 steaming hot or cold filtered water

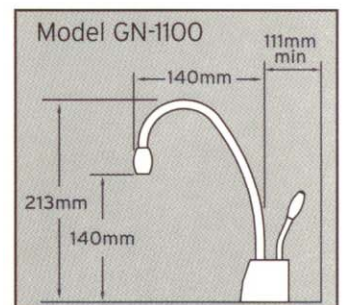

GN-1100 steaming hot filtered water

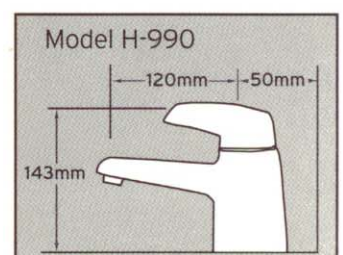

H-990 steaming hot water